

650.1

Portable digital thermometer



Features

- Direct reading in °C
- Records Max & Min values
- segment LCD display
- Built-in linearizator
- Low battery identification
- For thermocouples Chromel-Alumel «K»
- Can work with ε



Type METRA 202



±0.1% read. +0.2 °C from -200
±0.2% read. +1 °C above 200
+/- 1 °C
Battery 9V alkaline (iec 6f322)
max. 95% r.h. at 40 °C for 7 da
0-60 °C
4 digits, 8 mm height
if t/c burns out, "-1" appears
150 x 75 x 28 mm

Type 202	P/N 650.202
Range	-50 to +1372 °C
Resolution	0.1 °C up to 200 °C/ 1°C over 200 °C


Specifications

650.1


Probes in calibration "K" for portable instruments




Surface probe, with angle flat tip, spring loaded



Surface probe, with open tip, spring loaded



Surface very accurate "Pen" probe, flat band thermocouple

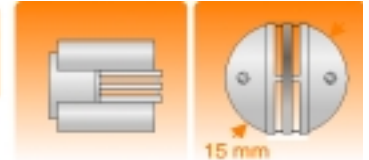


Surface mounted on ball bearing for rotating surfaces

Art. No.	Description	max. Temp.
650.127.1	L=1000 mm	-50...+400°C
650.127.3	L=3000 mm	-50...+400°C
650.127.6	L=6000 mm	-50...+400°C



Exposed hot junction head, Teflon sheath insulated



Exposed hot junction head, Fiber glass braid insulated

