



Below mentioned connectors are foreseen for thermocouple (TC) or thermoresistance (RTD) and present unique characteristics:

- Rugged construction: Glass filled thermoplastic body operational up to 220°C ceramic body for higher temperature upon request
- Interchangeable with all other brands
- 2 Types: STANDARD and MINI
- For RTD thermoresistance use "CU" copper pins 2 wires (3 pins upon request)
- Quality of measurement: full pins thermoelement material compatible
- Inexpensive
- Quick connect - disconnect
- Polarity coded: negative pin bigger
- Color coded: colours as per ANSI norms (DIN upon request)

All dimensions in mm

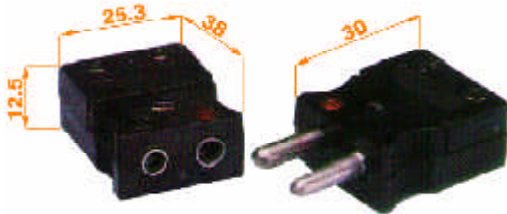


Code		Code METRA	
ST	Standard		Panel ST 2...24
M	Male plug	688.092	Panel ST 4x
F	Female socket	688.094	Panel ST 8x
FP	Female panel socket	688.096	Panel ST 12x

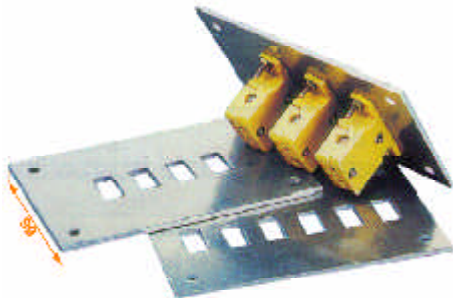

Code		Code		Code	
688.012	ST-M-K	688.022	ST-F-K-	688.032	ST-FP-K
688.013	ST-M-S	688.023	ST-F-S	688.033	ST-FP-S
688.014	ST-M-J	688.024	ST-F-J	688.034	ST-FP-J
688.016	ST-M-T	688.026	ST-F-T	688.036	ST-FP-T
688.018	ST-M-CU	688.028	ST-F-CU	688.038	ST-FP-CU



Code		Code METRA	
MINI M	Mini male		Panel MINI 2...24
MINI F	Mini female	689.092	Panel MINI 4x
MINI FP	Mini female panel	689.094	Panel MINI 8x
		689.096	Panel MINI 12x

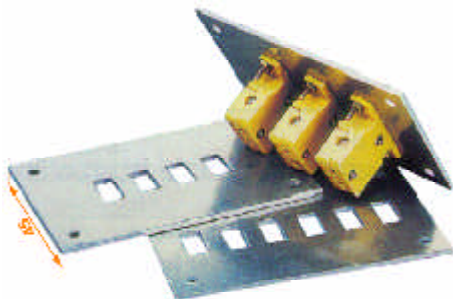

Code		Code		Code	
689.012	MINI-M-K	689.022	MINI-F-K	689.032	MINI-FP-K
689.013	MINI-M-S	689.023	MINI-F-S	689.033	MINI-FP-S
689.014	MINI-M-J	689.024	MINI-F-J	689.034	MINI-FP-J
689.016	MINI-M-T	689.026	MINI-F-T	689.036	MINI-FP-T
689.018	MINI-M-CU	689.028	MINI-F-CU	689.038	MINI-FP-CU



688.890

Cable Clamps
Secure and stabilize wire/connector junctions with these clamps.
Available in standard and miniature sizes

Note: For K-S-J-T-CU abbreviations see page 045 cable symbols